



KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkietierów 15, 02-273 Warszawa

Włączenie SMB Server na urządzeniach z serii Bizhub.

Logujemy się jako administrator na urządzenie i wchodzimy w zakładkę network:

The screenshot shows the Konica Minolta Web Connection interface. At the top, there is a navigation bar with the Konica Minolta logo, the user name 'Administrator', and a 'Logout' button. Below this, there are status indicators for 'Ready to Scan' and 'Ready to Print'. The main navigation menu includes 'Maintenance', 'System Settings', 'Security', 'User Auth/Account Track', 'Network', and 'Box'. Under 'Network', there are sub-menus for 'Print Setting', 'Store Address', 'Fax Settings', 'Wizard', 'Customize', and 'To Main Menu'. The 'SMB Server Settings' page is displayed, showing the following settings:

- SMB Server Settings:** ON (circled in red)
- SMB Server Common Settings:**
 - SMB Host Name: KM9D9DC8
 - Workgroup: WORKGROUP
 - SMB Authentication Protocol: SMB1.0/SMB2.0/SMB3.0
- SMB Print Setting:**
 - SMB Print: OFF
 - Print Service Name: 227
- Share SMB File Setting:**
 - Share SMB File: ON (circled in red)

At the bottom right of the settings page, there are 'OK' and 'Cancel' buttons. In the left sidebar, the 'SMB Setting' and 'SMB Server Settings' items are circled in red.

Giving Shape to Ideas

Konica Minolta Business Solutions Polska Sp. z o.o.
ul. Muszkietierów 15, 02-273 Warszawa, tel. (22) 560 33 00 faks (22) 560 33 03, www.konicaminolta.pl
Societe Generale SA 74 1840 0007 2212 8720 0810 1919
Sąd Rejonowy dla m.st. Warszawy, XIII Wydział Gospodarczy Krajowego Rejestru Sądowego, KRS nr 0000108685
Kapitał zakładowy: 5 050 500,00 PLN, NIP: 526-020-49-08



KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkietierów 15 ,02-273 Warszawa

Następnie wchodzimy w zakładkę Box i zakładamy skrzynkę:

The screenshot shows the Konica Minolta Web Connection interface. At the top, there is a navigation bar with the following items: Maintenance, System Settings, Security, User Auth/Account Track, Network, and Box (circled in red). Below this, there are more options: Print Setting, Store Address, Fax Settings, Wizard, Customize, and To Main Menu. On the left side, there are two expandable menus: 'User Box List' and 'System User Box List'. The 'System User Box List' menu is expanded, showing a 'New Registration' button (circled in red). The main content area displays the 'User Box List' section with a message: 'A new User Box can be registered.' Below the message, there are controls for 'Page Display(50/page)' set to 1 and 'Search from Index' set to ALL, with a 'Go' button. At the bottom, there is a table with the following data:

User Box Number	User Box Name	Type	Owner Name	Box Operation
1	test	Public	Public	Edit Delete

Giving Shape to Ideas

Konica Minolta Business Solutions Polska Sp. z o.o.
ul. Muszkietierów 15 ,02-273 Warszawa, tel. (22) 560 33 00 faks (22) 560 33 03, www.konicaminolta.pl
Societe Generale SA 74 1840 0007 2212 8720 0810 1919
Sąd Rejonowy dla m.st. Warszawy, XIII Wydział Gospodarczy Krajowego Rejestru Sądowego, KRS nr 0000108685
Kapitał zakładowy: 5 050 500,00 PLN, NIP: 526-020-49-08



KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkieterów 15 ,02-273 Warszawa

Po stworzeniu skrzynki wchodzimy klikając na Edit i włączamy User Box Expansion Function is changed i przestawiamy na ON - Auto Save Document to MFP Shared Folder:

KONICA MINOLTA Administrator Logout ?

PAGE SCOPE Web Connection Model Name:bizhub 227 Ready to Scan Ready to Print

Maintenance System Settings Security User Auth/Account Track Network Box

Print Setting Store Address Fax Settings Wizard Customize To Main Menu

► User Box List
► System User Box List

User Box Attribute Change

User Box Number: 1
User Box Name: test
Index: ABC

User Box Expansion Function is changed.
Confidential RX: OFF
New Communication Password:
Retype New Communication Password:
Auto Save Document to MFP Shared Folder: ON
SMB Communication Encryption: Do not Encrypt

User Box Password is changed.
New Password:
Retype New Password:

OK Cancel

Giving Shape to Ideas



KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkietarów 15 ,02-273 Warszawa

Następnie wchodzimy w zakładkę Store Address i zakładamy adres User Box:

The screenshot shows the Konica Minolta Web Connection interface. At the top, there is a header with the Konica Minolta logo, the text 'KONICA MINOLTA', and 'Administrator' next to a user icon. There are 'Logout' and '?' buttons. Below the header, there is a 'Web Connection' section with 'Model Name: bizhub 227' and status indicators for 'Ready to Scan' and 'Ready to Print'. A navigation bar contains several menu items: Maintenance, System Settings, Security, User Auth/Account Track, Network, Box, Print Setting, Store Address (highlighted with a red circle), Fax Settings, Wizard, Customize, and To Main Menu. Below the navigation bar, there is a 'New Registration' dialog box. On the left side of the dialog, there is a list of categories: Address Book, Group, Program, Temporary One-Touch, Subject, Text, Application Registration, and Prefix/Suffix. On the right side, there is a list of registration types: E-mail, FTP, SMB, WebDAV, User Box (selected and circled in red), and Fax. At the bottom right of the dialog, there are 'OK' and 'Cancel' buttons.

Giving Shape to Ideas

Konica Minolta Business Solutions Polska Sp. z o.o.
ul. Muszkietarów 15 ,02-273 Warszawa, tel. (22) 560 33 00 faks (22) 560 33 03, www.konicaminolta.pl
Societe Generale SA 74 1840 0007 2212 8720 0810 1919
Sąd Rejonowy dla m.st. Warszawy, XIII Wydział Gospodarczy Krajowego Rejestru Sądowego, KRS nr 0000108685
Kapitał zakładowy: 5 050 500,00 PLN, NIP: 526-020-49-08



KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkietierów 15, 02-273 Warszawa

Następnie w Destination Information przypisujemy nasz adres do Box który stworzyliśmy dla SMB Server:

KONICA MINOLTA Administrator Logout ?

PAGE SCOPE Web Connection Model Name: bizhub 227 Ready to Scan Ready to Print

Maintenance System Settings Security User Auth/Account Track Network Box

Print Setting Store Address Fax Settings Wizard Customize To Main Menu

▶ Address Book

- ▶ Group
- ▶ Program
- ▶ Temporary One-Touch
- ▶ Subject
- ▶ Text
- ▶ Application Registration
- ▶ Prefix/Suffix

Address Book (User Box)

No.
 Use opening number
 Direct Input

Name

Sort Character

Index
Specify a keyword for address search and display by registered name.
 Main

Destination Information
User Box No.

Registered Box Number
 (1-999999999)

Limiting Access to Destinations


Giving Shape to Ideas




KONICA MINOLTA

Konica Minolta Business Solutions Polska Sp. z o.o.
Ul. Muszkietierów 15 ,02-273 Warszawa

Następnie na komputerze klienta tworzymy skrót z udostępnionym zasobem SMB:

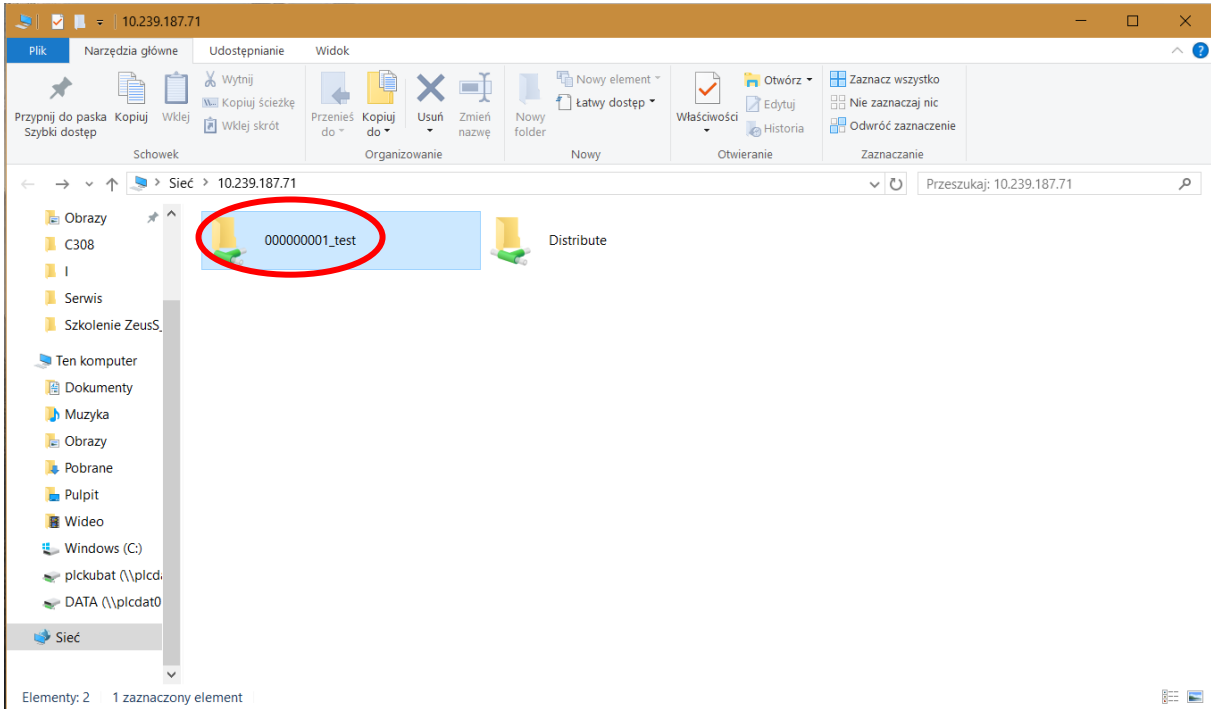

A na urządzeniu w zależności od potrzeby możemy zrobić skrót w zakładce Skanuj:

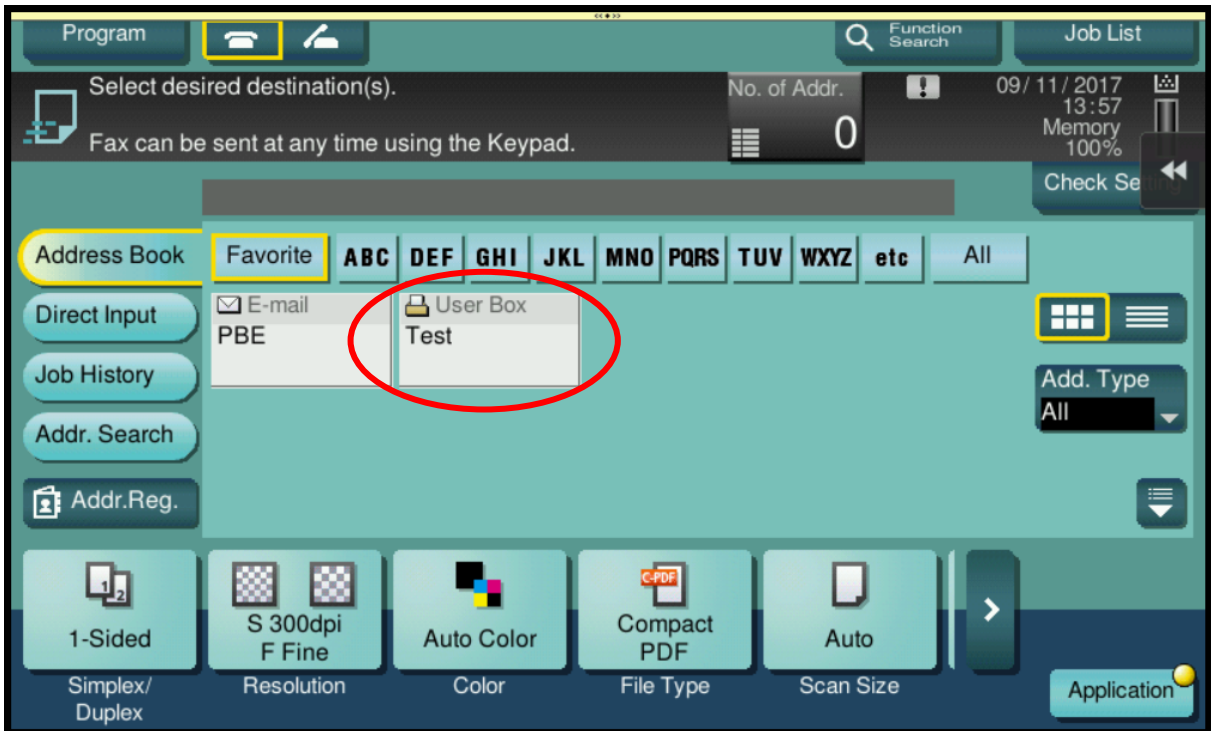

Włodzimierz Kubatin
Dział Wsparcia Technicznego
Konica Minolta

Giving Shape to Ideas

Konica Minolta Business Solutions Polska Sp. z o.o.
ul. Muszkietierów 15 ,02-273 Warszawa, tel. (22) 560 33 00 faks (22) 560 33 03, www.konicaminolta.pl
Societe Generale SA 74 1840 0007 2212 8720 0810 1919
Sąd Rejonowy dla m.st. Warszawy, XIII Wydział Gospodarczy Krajowego Rejestru Sądowego, KRS nr 0000108685
Kapitał zakładowy: 5 050 500,00 PLN, NIP: 526-020-49-08